


High definition unidirectional condenser microphone with high external rejection.

This condenser microphone is the perfect choice for any application where transient content needs to be captured with maximum accuracy. Owing to its extremely light diaphragm, the microphone is highly insensitive to handling noise. An all-metal body provides efficient protection from RF interference and the microphone is rugged enough to give excellent results even under very harsh conditions.

<b>Type</b>	Condenser
<b>Polar Pattern</b>	Cardioid
<b>Sensitivity</b>	-46 dBV/PA
<b>Frequency Range</b>	30 - 20.000 Hz
<b>Impedance</b>	<250 ohm
<b>Connector</b>	XLR 3-Pin Male
<b>Size</b>	22 mm x 156 mm
<b>Net Weight</b>	200 g
<b>Power</b>	9 - 52 V DC Phantom
<b>accessories</b>	stand adaptor + wind shield

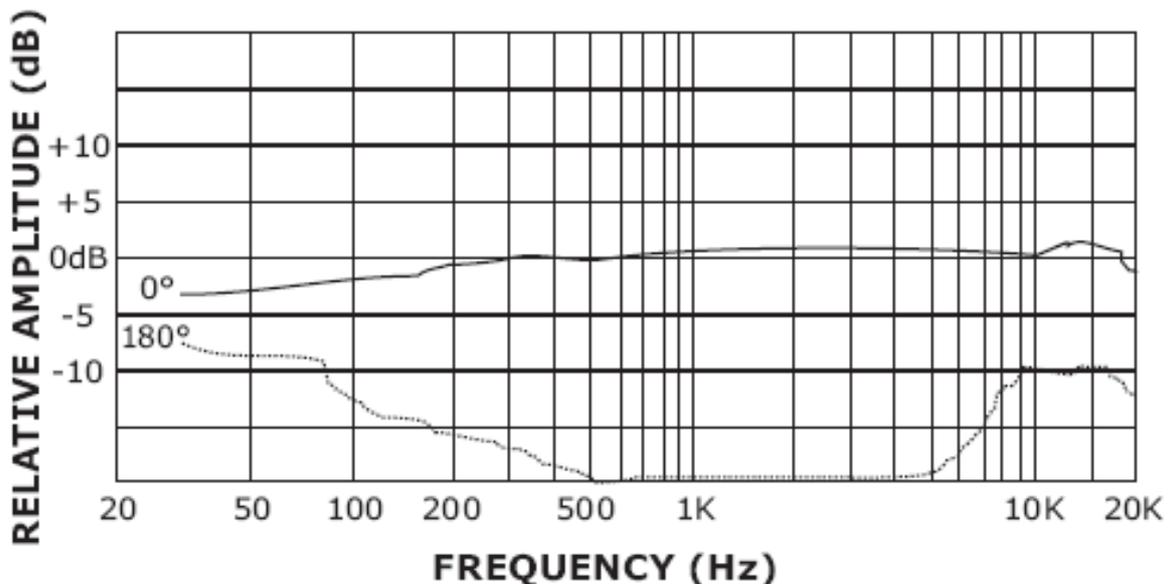

New materials and design are introduced into existing products without previous notice.  
Present systems may differ in some respects from those presented in this brochure.