



pro audio tools

XRM

l monitor system which includes belt pack receivers, high dynamic in ear transducers and radio noise reduction transmitters

Transducers


type dynamic in ear plugs
frequency 100-18.000 Hz

Receiver belt pack
output mini jack
sensitivity
impedance



Radio Frequencies

- Mhz
- Mhz
- Mhz
- Mhz
- Mhz

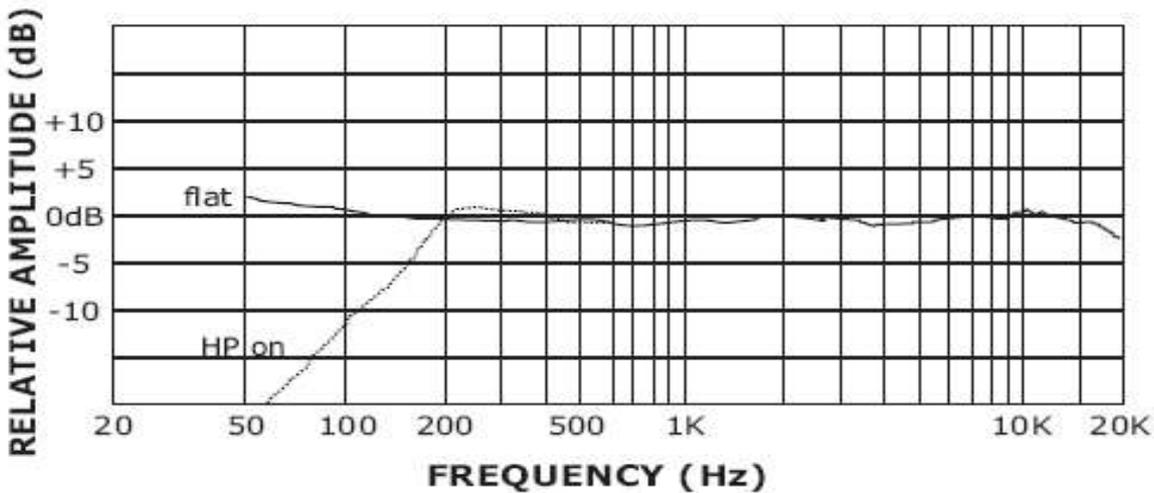

New materials and design are introduced into existing products without previous notice. Present systems may differ in some respects from those presented in this brochure.